

SWISSMA SNAPWELT ROOFING SYSTEM


- Up to 25 years warranty for ZINCALUME® Steel and Clean COLORBOND® Steel material
- Sleek and cost efficient
- Modern solution for residential and commercial building roof
- Quick and easy installation
- Concealed fix, no puncture
- Can be customised to meet any thermal and acoustic requirement

member of :




clean Colorbond®
THERMATECH®

SWISSMA SNAPWELT ROOFING SYSTEM

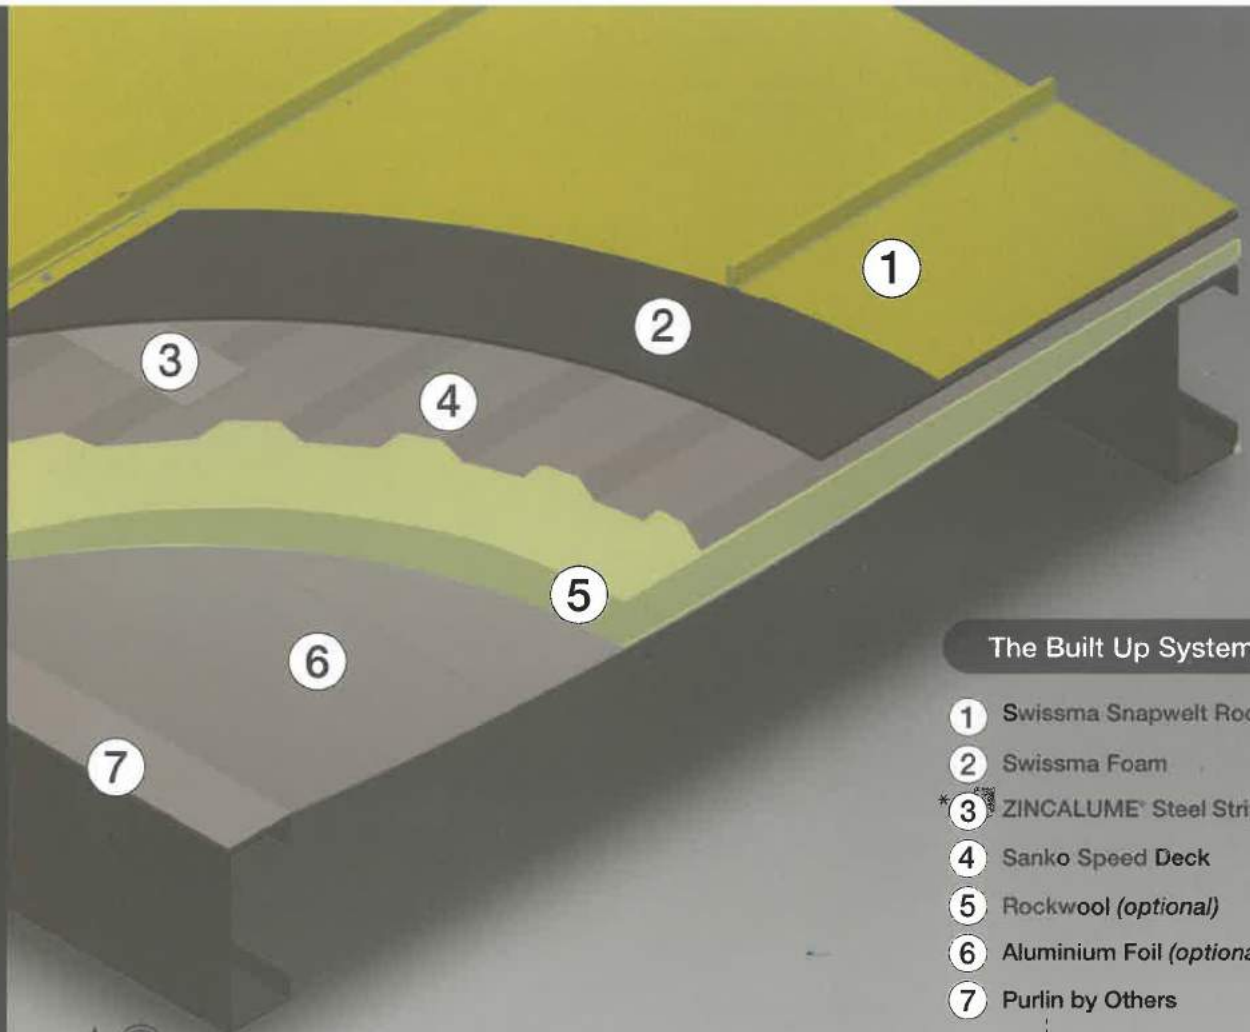

The Built Up System

- 1 Swissma Snapwelt Roof
- 2 Swissma Foam
- * 3 ZINCALUME® Steel Strip
- 4 Sanko Speed Deck
- 5 Rockwool (optional)
- 6 Aluminium Foil (optional)
- 7 Purlin by Others

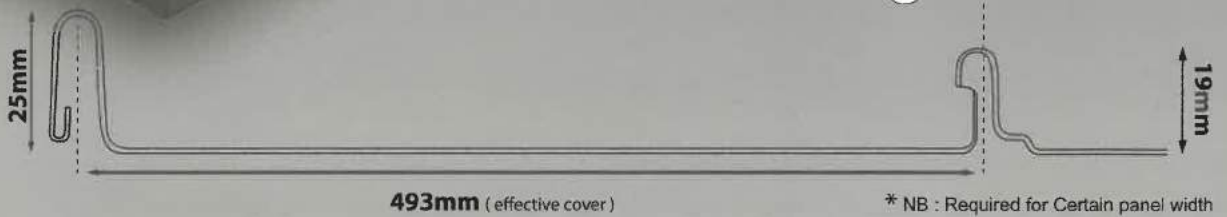

Specification

Material	ZINCALUME® Steel Clean COLORBOND® Steel PRIMAMAJU® Steel
Thickness	0.42mm BST
Effective Width	493mm (25mm HT)*standard 425mm (38mm HT)
Rib height	25mm
Shape	Straight panels only
Support Spacing	1200mm (recommended)
Application	Roof and wall cladding
Minimum Pitch	3° (recommended)
Maximum Length	To be advised depending on the pitch

Distributed by :

